UNIVERSITÉ DE RENNES 1

Information fusion and conflict management

Arnaud Martin

Arnaud.Martin@univ-rennes1.fr

Université de Rennes 1 - IRISA, Lannion, France

Xi'an, July, 6th 2017

INSTITUT DE RECHERCHE EN INFORMATIQUE ET SYSTEMES ALÉATOIRES



UMR IRISA

Outline

1. Introduction to information fusion
2. Theory of belief functions for information fusion
3. Managing conflict
4. Decisions with conflicting bbas

What is information?



: The traffic is dense on the runway, ready for takeoff.

What is information?



: The traffic is dense on the runway, ready for takeoff.

Imprecise proposition

What is information?



: The traffic is dense on the runway, ready for takeoff.

Imprecise proposition



: Ten aircrafts were on the runway, ready for takeoff.

What is information?



: The traffic is dense on the runway, ready for takeoff.

Imprecise proposition



: Ten aircrafts were on the runway, ready for takeoff.

Precise proposition

What is information?



: The traffic is dense on the runway, ready for takeoff.

Imprecise proposition



: Ten aircrafts were on the runway, ready for takeoff.

Precise proposition

Imprecision is a kind of imperfection of information

What is information?



: A boeing 777 is at the position x, y, z

What is information?



: A boeing 777 is at the position x, y, z

Bad weather

Uncertain proposition

What is information?



: A boeing 777 is at the position x, y, z

Bad weather
Uncertain proposition

Good weather
Certain proposition

What is information?



: A boeing 777 is at the position x, y, z

Bad weather
Uncertain proposition

Good weather
Certain proposition

Uncertainty is another kind of imperfection of information

How are the sources?



: I am sure that is a fighter plane.

A



: That is maybe a A380

B

FUSION



How are the sources?



: I am sure that is a fighter plane.

A



: That is maybe a A380

B

Conflict of information sources has to be solved

FUSION



How are the sources?



: I am sure that is a fighter plane.

A



: That is maybe a A380

B

FUSION



A is often mistaken

B is never wrong

How are the sources?



: I am sure that is a fighter plane.

A



: That is maybe a A380

B

FUSION



: That is maybe a A380

A is often mistaken

B is never wrong

How are the sources?



: I am sure that is a fighter plane.

A



: That is maybe a A380

B

FUSION **Reliability** of information sources has to be considered



A is often mistaken

B is never wrong

Interest of information fusion

Assume all the sources are completly reliable giving totally certain and precise information









FUSION

Interest of information fusion

Assume all the sources are completly reliable giving totally certain and precise information

 : This is an A380

 : This is an A380

 : This is an A380



FUSION

Interest of information fusion

Assume all the sources are completly reliable giving totally certain and precise information

 : This is an A380

 : This is an A380

 : This is an A380

 : This is an A380

FUSION

Imperfections

Imperfections on information

- Uncertainty: Degree of conformity to the reality
- Imprecision: quantitative default of knowledge on the information contain
- Incompleteness: lack of information

Sources of information

- Reliability: to give an indisputable information
- Independence: Sources are not linked (assumption often made)
- Conflicting sources: Sources give information in contradiction

Information fusion

Goal: To combine information coming from many imperfect sources in order to improve the decision making taking into account of imprecisions and uncertainties
To combine information coming from imperfect sources leads fatally to conflict

Three actions are possible face to imperfections:

1. We can try to suppress its
2. We can tolerate its and so we need robust algorithms against these imperfections
3. We can model its

To model imperfections: uncertainty theories:
Probability theory (Bayesian approach) or possibility theory or the theory of belief functions

Fusion architecture for classifiers fusion

s sources S_1, S_2, ..., S_s that must take a decision on an observation x in a set of n classes $x \in \Omega = \{\omega_1, \omega_2, \ldots, \omega_n\}$ classes

$$\begin{array}{c} \\ S_1 \\ \vdots \\ S_j \\ \vdots \\ S_s \end{array} \begin{array}{c} \begin{array}{cccccc} \omega_1 & \ldots & \omega_i & \ldots & \omega_n \end{array} \\ \begin{bmatrix} M_1^1(x) & \ldots & M_i^1(x) & \ldots & M_n^1(x) \\ \vdots & \ddots & \vdots & \ddots & \vdots \\ M_1^j(x) & \ldots & M_i^j(x) & \ldots & M_n^j(x) \\ \vdots & \ddots & \vdots & \ddots & \vdots \\ M_1^s(x) & \ldots & M_i^s(x) & \ldots & M_n^s(x) \end{bmatrix} \end{array} \quad (1)$$

Steps of information fusion

Problems

- How to combine the information coming from all the sources?
- How to take the decision?

Under-problems depending on the application

- How to model information? *i.e.* choice of a formalism
- How to estimate the model parameters?

4 steps

1. Modeling
2. Estimation
3. Combination
4. Decision

Voting process

Modeling: Indicator functions

$$M_i^j(x) = \begin{cases} 1 \text{ if } S_j \ : x \in \omega_i \\ 0 \text{ otherwise} \end{cases}$$

Estimation: α_{ij}: reliability of a source for a given class

Combination:

$$M_i^E(x) = \sum_{j=1}^{s} \alpha_{ij} M_i^j(x)$$

Decision:

$$x \in \omega_k \text{ if } M_k^E(x) = \max_i M_i^E(x) \geq c.s + b(x)$$
$$x \in \omega_{n+1} \text{ otherwise } \textit{i.e.} \text{ no decision}$$
$$c \in [0,1],\ b(x) \text{ function of } M_k^E(x)$$

Voting process: A result

- **Assumptions**
  - Statistical independence of sources
  - Same probability of success p
  - s odd and > 2 (same kind of result if s is even)
- Then
  With P_R the probability of success after fusion by voting process
  - If $p > 0.5$, P_R tends toward 1 with s
  - If $p < 0.5$, P_R tends toward 0 with s
  - If $p = 0.5$, $P_R = 0.5$ for all s

Behind this result: The majority should have right for fusion.

Probability theory for information fusion

Modeling: A probability is a positive and additive measure, p is defined on a σ-algebra of $\Omega = \{\omega_1, \omega_2, \ldots, \omega_n\}$ and takes values in [0,1].
It verifies: $p(\emptyset) = 0$, $p(\Omega) = 1$, $\sum_{X \in \Omega} p(X) = 1$

Estimation: Choice of the distribution, and/or estimation of parameters

Combination: Bayes rule

$$p(x \in \omega_i / S_1, \ldots, S_s) = \frac{p(S_1, \ldots, S_s / x \in \omega_i) p(x \in \omega_i)}{p(S_1, \ldots, S_s)} \quad (2)$$

Independence assumption must of the time necessary

Decision: *a posteriori* maximum, likelihood maximum, mean maximum, *etc.*

Limits of the theory of probabilities

- Difficulties to model the absence of knowledge (ex: Sirius)
- Constraint on the classes (exhaustive and exclusive)
- Constraint on the measures (additivity)

Example of Smets on the matter of additivity

If one symptom f (for fiver) is always true when a patient get a illness A (flu) ($p(f|A) = 1$), and if we observe this symptom f, then the probability of the patient having A increases (because $p(A|f) = p(A)/p(f)$ so $p(A|f) \geq p(A)$).

The additivity constraint require then that the probability of the patient having not A decreases:
$p(\overline{A}|f) = 1 - p(\overline{A}|f)$ so $p(\overline{A}|f) \leq p(\overline{A})$


While there is no reason if the symptom f can be also observe in some other diseases.

Outline

1. Introduction to information fusion
2. Theory of belief functions for information fusion
3. Managing conflict
4. Decisions with conflicting bbas

Bases on Belief functions

- Use of functions defined on sub-sets instead of singletons such as probabilities
- Discernment frame: $\Omega = \{\omega_1, \ldots, \omega_n\}$, with ω_i are exclusive and exhaustive classes
- Power set: $2^\Omega = \{\emptyset, \{\omega_1\}, \{\omega_2\}, \{\omega_1 \cup \omega_2\}, \ldots, \Omega\}$.
- Several functions in one to one correspondence model uncertainty and imprecision: mass functions, belief functions, plausilibity functions
- Extension of 2^Ω to D^Ω, hyper power set in order to model the conflicts
  - D^Ω closed set by union and intersection operators
  - D_r^Ω: reduced set with constraints $(\omega_2 \cap \omega_3 \equiv \emptyset)$

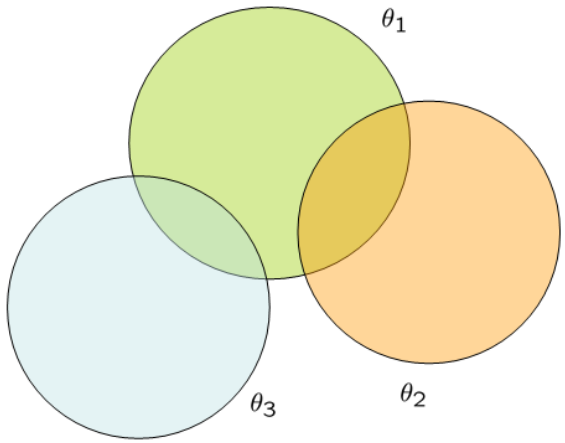

Mass functions

- The basic belief functions (bba or mass functions) are defined on 2^Ω and take values in $[0, 1]$
- Normalization condition: $\sum_{X \in 2^\Omega} m(X) = 1$
- A focal element is an element X of 2^Ω such as $m(X) > 0$
- Closed world: $m(\emptyset) = 0$
- We note m_j the mass function of the source S_j

Mass functions

Special cases:

- If only focal elements are ω_i then m_j is a probability
- $m_j(\Omega) = 1$: total **ignorance** of S_j
- categorical mass function: $m_j(X) = 1$ (noted m_X): S_j has an imprecise knowledge
- $m_j(\omega_i) = 1$: S_j has a precise knowledge
- simple mass functions X^w:
  $m_j(X) = w$ and $m_j(\Omega) = 1 - w$: S_j has an **uncertain and imprecise** knowledge

Discounting

From (Shafer, 1976):

$$m_j^\alpha(X) = \alpha_j m_j(X), \forall X \in 2^\Omega$$
$$m_j^\alpha(\Omega) = 1 - \alpha_j(1 - m_j(\Omega))$$

$\alpha_j \in [0, 1]$ discounting coefficient can be seen as the reliability of the source S_j

If $\alpha_j = 0$ the source are completely unreliable, all the mass is transfered on Ω, the total ignorance

The discounting process increases the intervals $[\mathrm{bel}_j, \mathrm{pl}_j]$ (and so reduces the global conflict in the conjunctive combination rule)

Go back on fusion architecture

s sources S_1, S_2, ..., S_s that must take a decision on an observation x in a set of n classes $x \in \Omega = \{\omega_1, \omega_2, \ldots, \omega_n\}$ classes

$$
\begin{array}{c}
 \\
S_1 \\
\vdots \\
S_j \\
\vdots \\
S_s
\end{array}
\begin{array}{c}
\begin{array}{cccccc} \omega_1 & & \ldots & & \omega_i & & \ldots & & \omega_n \end{array} \\
\left[\begin{array}{ccccc}
m_1^1(x) & \ldots & m_i^1(x) & \ldots & m_n^1(x) \\
\vdots & \ddots & \vdots & \ddots & \vdots \\
m_1^j(x) & \ldots & m_i^j(x) & \ldots & m_n^j(x) \\
\vdots & \ddots & \vdots & \ddots & \vdots \\
m_1^s(x) & \ldots & m_i^s(x) & \ldots & m_n^s(x)
\end{array}\right]
\end{array}
$$

Distance based model (Denœux 1995)

Only ω_i and Ω are focal elements, $n * s$ sources (experts)

- Prototypes case ($\mathbf{x}_i$ center of ω_i). For the observation x

$$\begin{aligned} m_j^i(\omega_i) &= \alpha_{ij} \exp[-\gamma_{ij} d^2(x, \mathbf{x}_i)] \\ m_j^i(\Omega) &= 1 - \alpha_{ij} \exp[-\gamma_{ij} d^2(x, \mathbf{x}_i)] \end{aligned}$$

  - $0 \leq \alpha_{ij} \leq 1$: discounting coefficient and $\gamma_{ij} > 0$, are parameters to play on the quantity of ignorance and on the form of the mass functions
  - The distance allows to give a mass to x higher according to the proximity to ω_i
- belief k-nn: we consider the k-nearest neighbors instead to $\mathbf{x}_i$
- Then we combine the bbas

Probabilistic based model

- 2 models proposed by Appriou according to three axioms:
  1. the $n * s$ couples $[m_i^j, \alpha_{ij}]$ are distinct information sources where focal elements are: ω_i, $\overline{\omega_i}$ and Ω
  2. If $m_i^j(\omega_i) = 0$ and the information is valid $(\alpha_{ij} = 1)$ then it is certain that ω_i is not true.
  3. Conformity to the Bayesian approach (case where $p(S_j|\omega_j)$ is exactly the reality $(\alpha_{ij} = 1)$ for all i, j) and all the *a priori* probabilities $p(\omega_i)$ are known)
- Need to estimate $p(S_j|\omega_i)$

Probabilistic based model

Model 1:

$$\begin{aligned} m_j^i(\omega_i) &= \frac{\alpha_{ij} R_j p(S_j|\omega_j)}{1 + R_j p(S_j|\omega_j)} \\ m_j^i(\overline{\omega_i}) &= \frac{\alpha_{ij}}{1 + R_j p(S_j|\omega_j)} \\ m_j^i(\Omega) &= 1 - \alpha_{ij} \end{aligned}$$

with $R_j \geq 0$ a normalization factor.

Model 2:

$$\begin{aligned} m_j^i(\omega_i) &= 0 \\ m_j^i(\overline{\omega_i}) &= \alpha_{ij}(1 - R_j p(S_j|\omega_j)) \\ m_j^i(\Omega) &= 1 - \alpha_{ij}(1 - R_j p(S_j|\omega_j)) \end{aligned}$$

with $R_j \in [0, (\max_{S_j,i}(p(S_j|\omega_j)))^{-1}]$

Probabilistic vs Distance

Difficulties:

- Appriou: learning the probabilities $p(S_j|\omega_j)$
- Denœux: choice of the distance $d(x, \mathbf{x}_i)$

Easiness:

- $p(S_j|\omega_j)$ easer to estimate on decisions with the confusion matrix of the classifiers
- $d(x, \mathbf{x}_i)$ easer to choose on the numeric outputs of classifiers (ex.: Euclidean distance)

Conjunctive rules

- Assume: two cognitively independent and reliable sources S_1 and S_2.
- The conjunctive rule is given for m_1 and m_2 bbas of S_1 and S_2, for all $X \in 2^\Omega$, with $X \neq \emptyset$ by:

$$m_{\text{Conj}}(X) = \sum_{Y_1 \cap Y_2 = X} m_1(Y_1) m_2(Y_2) \tag{3}$$

	$\emptyset$	ω_1	ω_2	ω_3	Ω
m_1	0	0.5	0.1	0	0.4
m_2	0	0.2	0	0.5	0.3
m	0.32	0.33	0.03	0.2	0.12

Dempster's rule

- Dempster's rule:

$$m_{\mathrm{D}}(X) = \frac{1}{1-\kappa} m_{\mathrm{Conj}}(X) \tag{4}$$

where $\kappa = \sum_{A \cap B = \emptyset} m_1(A) m_2(B)$ is generally called conflict or *global conflict*. That is the sum of the *partial conflicts*.

- That is not a conflict measure (Liu, 2006).
- Conjunctive rules are not idempotent

Idempotence

	$\emptyset$	ω_1	ω_2	ω_3	Ω
m_1	0	0.7	0.2	0.1	0
m_2	0	0.7	0.2	0.1	0
m_{D}					
m_{Conj}					

Idempotence

	$\emptyset$	ω_1	ω_2	ω_3	Ω
m_1	0	0.7	0.2	0.1	0
m_2	0	0.7	0.2	0.1	0
m_{D}	0	0.91	0.07	0.02	0
m_{Conj}	0.46	0.49	0.04	0.01	0

The mass on the empty set obtained by the combination of two identical bbas is not null.

Decision on Ω

- In general the decision is made on Ω and not on 2^Ω
  - Pessimist: $\max_{\omega\in\Omega} bel(\omega)$
  - Optimist: $\max_{\omega\in\Omega} pl(\omega)$
  - Compromise: $\max_{\omega\in\Omega} betP(\omega)$

Pignistic probability:

$$\mathrm{betP}(\omega) = \sum_{Y\in 2^\Omega, \omega\cap Y\neq\emptyset} \frac{1}{|Y|}\frac{m(Y)}{1-m(\emptyset)} \tag{5}$$

Decision on the unions

- Decision on 2^Ω
- The decision functions f_d (belief, plausibility, pignistic probability, etc.) increase by inclusion (Appriou, 2014)

$$A = \underset{X \in 2^\Omega}{\operatorname{argmax}} \left(m_d(X) f_d(X) \right),$$

where

$$m_d(X) = \left(\frac{K_d \lambda_X}{|X|^r} \right)$$

with $r \in [0, 1]$, is a weighted factor of the wanted precision of the decision:
$r = 1$: singleton,
$r = 0$: ignorance

Outline

1. Introduction to information fusion
2. Theory of belief functions for information fusion
3. Managing conflict
4. Decisions with conflicting bbas

Conflict origins

Definition *The* **conflict** *in the theory of belief functions can be defined by the contradiction between two or more mass functions.*

- The sources are not reliable:
  reliability and conflict are very linked in this case
- The discernment frame is not exhaustive:
  the closed world assumption must be avoid
- The sources do not express on the same phenomena:
  bbas must not be combined

Let note $\mathrm{Conf}(m_1, m_2)$ a conflict measure between two mass functions m_1 and m_2.

Confusion in conflict

- Many measures are called conflict in the theory of belief functions but are not conflict
- The global conflict contains an indication of the conflict between bbas, but not only
- Some terms such as internal conflict, discord, contradiction are not conflict
- Some uncertainty measures such as entropic measures can be sometimes called conflict, but are not conflict

Auto-conflict: a discord measure

Introduced by Osswald and Martin, 2006, the auto-conflict of order s for one expert is given by:

$$a_s = \left(\textcircled{\cap}_{j=1}^{s} m\right)(\emptyset). \tag{6}$$


where $\textcircled{\cap}$ is the conjunctive operator.

The following property holds:

$$a_s \leq a_{s+1}$$

$\lim_{s \to +\infty} a_s = 1$ if the intersection of all focal elements of m is empty

The global conflict must be weighted with the auto-conflict.

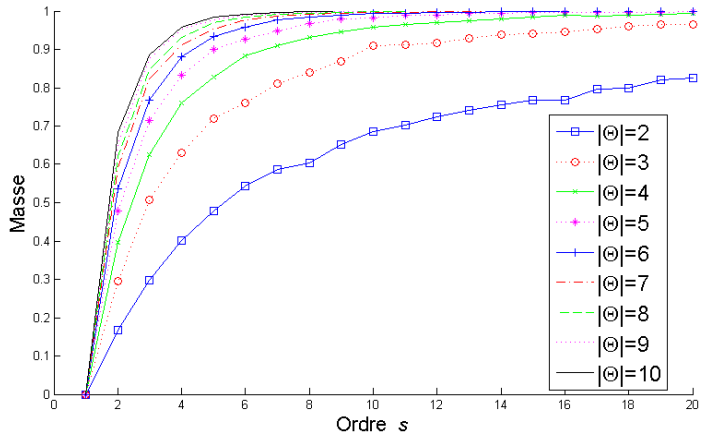

Mean of auto-conflict for generated bbas

Another discord measure is given by the internal conflict of Schubert (2012).

Conflict measures

- Based on the global conflict coming from the conjunctive rule:

$\mathrm{Conf}(m_1, m_2) = m_{\mathrm{Conj}}(\emptyset)$ (point of view of Smets (2007))
$\mathrm{Conf}(m_1, m_2) = -\ln(1 - m_{\mathrm{Conj}}(\emptyset))$ Yager (1983)

  - pros: $\mathrm{Conf}(m_1, m_\Omega) = 0$
    where $m_\Omega(\Omega) = 1$ is the total ignorance
  - cons:
    1. $\mathrm{Conf}(m_1, m_1) \neq 0$ because of the non-idempotence
    2. $m_{\mathrm{Conj}}(\emptyset)$ contains a part of the auto-conflict of m_1 and m_2
    3. The conjunctive rule needs the independence assumption between the sources: There is no reason to get a link between independence and conflict

Conflict measure: based on distance

$\text{Conf}(m_1, m_2) = d(m_1, m_2)$ (Martin *et al.*, 2008)
Conflict between an expert S_j and the $s-1$ other experts is given by the the mean of conflicts two by two:

$$\text{Conf}(m_j, m_{\mathcal{E}}) = \frac{1}{s-1} \sum_{e=1, e\neq j}^{s} \text{Conf}(j, e) \tag{7}$$

Another definition is given by: $\text{Conf}(m_j, m_s) = d(m_j, m_{\mathcal{E}})$
where $m_{\mathcal{E}}$ is the bba of the artificial expert build by the combined bbas of the $s-1$ other experts of $\mathcal{E}$ without the expert S_j.

- pros: $\text{Conf}(m_1, m_1) = 0$
- cons: $\text{Conf}(m_1, m_\Omega) \neq 0$

Digression on distances

The Jousselme *et al.* (2001) distance can be done by:

$$d(m_1, m_2) = \sqrt{\frac{1}{2}(\mathbf{m}_1 - \mathbf{m}_2)^T \underline{\underline{D}}(\mathbf{m}_1 - \mathbf{m}_2)},$$

where $\underline{\underline{D}}$ is an $2^{|\Theta|} \times 2^{|\Theta|}$ matrix based on Jaccard dissimilarity

$$D(A, B) = \begin{cases} 1, \text{ if } A = B = \emptyset, \\ \\ \dfrac{|A \cap B|}{|A \cup B|}, \forall A, B \in 2^{\Theta}. \end{cases}$$

Distance based on plausibility (Jousselme and Maupin (2011)): $d(m_1, m_2) = 1 - \frac{\mathbf{pl}_1^T . \mathbf{pl}_2}{\|\mathbf{pl}_1\| \|\mathbf{pl}_2\|}$, where **pl** is the plausibility function and $\mathbf{pl}_1^T . \mathbf{pl}_2$ the vector product in 2^n space of both plausibility functions.

Conflict measure: based on inclusion

We define a conflict measure between two mass functions m_1 and m_2 by (Martin, 2012):

$$\text{Conf}(m_1, m_2) = (1 - \delta_{inc}(m_1, m_2))d(m_1, m_2) \tag{8}$$

where d is the distance, δ_{inc} is a degree of inclusion. This measure holds axioms:

1. **Non-negativity:** $\text{Conf}(m_1, m_2) \geq 0$
2. **Identity:** $\text{Conf}(m_1, m_1) = 0$
3. **Symmetry:** $\text{Conf}(m_1, m_2) = \text{Conf}(m_2, m_1)$
4. **Normalization:** $0 \leq \text{Conf}(m_1, m_2) \leq 1$
5. **Inclusion:** $\text{Conf}(m_1, m_2) = 0,$ iff $m_1 \subseteq m_2$ or $m_2 \subseteq m_1$
   The mass functions cannot be in conflict if one is included in the other one.

Reliability estimation

If the conflict comes from unreliable sources: reliability estimation


Assumption: a source is unreliable if it is in conflict with the other sources

Reliability measure: such as a decreasing function of the conflict measure

$$\alpha_j = f(\mathrm{Conf}(j,s))$$
$$\alpha_j = \left(1 - \mathrm{Conf}(j,s)^{\lambda}\right)^{1/\lambda}$$

Integration of the reliability measure by discounting

$$m_j^{\alpha}(X) = \alpha_j m_j(X),\ \forall X \in 2^{\Omega}$$
$$m_j^{\alpha}(\Omega) = 1 - \alpha_j(1 - m_j(\Omega))$$

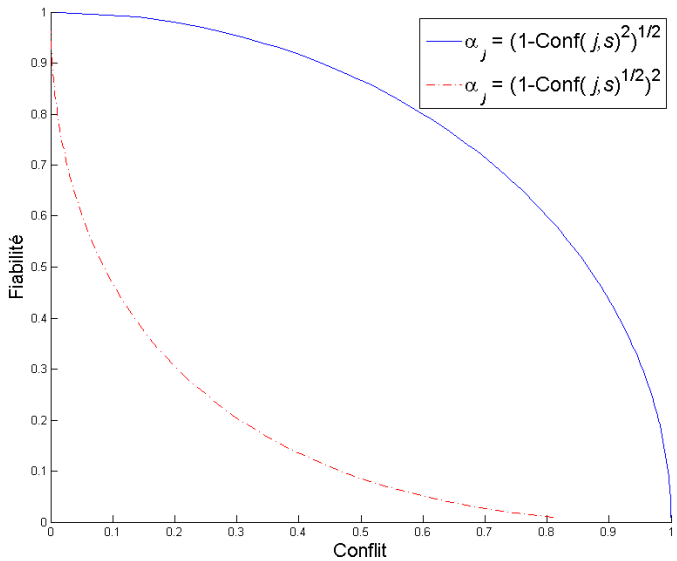

Managing the conflict in the combination

Zadeh example

	$\emptyset$	ω_1	ω_2	ω_3	Ω	Decision with betP
m_1	0	0.9	0	0.1	0	ω_1
m_2	0	0	0.9	0.1	0	ω_2
m_{D}	0	0	0	1	0	ω_3

Solutions

- Conflict coming from a false assumption of closed world
- Conflict coming from the assumption of source's independence
- Conflict coming from source's ignorance assumption
- Conflict coming from source reliability assumption
- Conflict coming from a number of sources

False assumption of closed world

- Closed world: Frame of discernment assumed to be exhaustive
- Smets interpreted $m(\emptyset) > 0$ such as another element and used the conjunctive rule m_{Conj}
- $m(\emptyset)$ is composed of all the partial conflict: we can considered such as many unknown elements.

False assumption of closed world

The PCR6 (Martin et Osswald, 2006, 2007)

This rule transfers the partial conflicts on the elements that generate it, proportionally to their mass functions.

$$m_{\mathrm{PCR6}}(X) = m_{\mathrm{Conj}}(X) + \sum_{\substack{Y \in D^{\Omega}, \\ X \cap Y \equiv \emptyset}} \left(\frac{m_1(X)^2 m_2(Y)}{m_1(X) + m_2(Y)} + \frac{m_2(X)^2 m_1(Y)}{m_2(X) + m_1(Y)} \right) \tag{9}$$

$$m_{\mathrm{PCR6}}(X) = m_{\mathrm{Conj}}(X) + \sum_{j=1}^{s} m_i(X)^2 \sum_{\substack{\bigcap_{j'=1}^{s-1} Y_{\sigma_j(j')} \cap X = \emptyset \\ (Y_{\sigma_j(1)}, \ldots, Y_{\sigma_j(s-1)}) \in (D_r^{\Omega})^{s-1}}} \left(\frac{\prod_{j'=1}^{s-1} m_{\sigma_j(j')}(Y_{\sigma_j(j')})}{m_j(X) + \sum_{j'=1}^{s-1} m_{\sigma_j(j')}(Y_{\sigma_j(j')})} \right)$$

Assumption of source's independence

- If dependent sources: combination rule has to be idempotent
- The simplest way: the average of the mass functions:

$$m_{\mathrm{M}}(X) = \frac{1}{s} \sum_{j=1}^{S} m_j(Y_j). \tag{10}$$

- The cautious rule of S non-dogmatic mass functions $m_j, j = 1, 2, \cdots, S$:

$$m_{\mathrm{cau}}(X) = \textcircled{\cap}_{A \subsetneq \Omega} A^{\overset{S}{\underset{j=1}{\wedge}} w_j(A)}, \tag{11}$$

where $A^{w_j(A)}$ is the simple support function focused on A with weight function $w_j(A)$ issued from the canonical decomposition of m_j. Note also that $\wedge$ is the min operator.

Yager (1987) rule

- Assumption: the global conflict comes from the ignorance
- Stay in closed world
- The mass of the empty set is transfered on the global ignorance Ω

$$\begin{aligned} m_{\mathrm{Y}}(X) &= m_{\mathrm{Conj}}(X), \forall X \in 2^{\Omega} \setminus \{\emptyset, \Omega\} \\ m_{\mathrm{Y}}(\Omega) &= m_{\mathrm{Conj}}(\Omega) + m_{\mathrm{Conj}}(\emptyset) \\ m_{\mathrm{Y}}(\emptyset) &= 0. \end{aligned}$$

Dubois and Prade (1988) rule

- Assumption: Partial conflict comes from the partial ignorances
- The partial conflict are transfered on the partial ignorances

$$m_{\mathrm{DP}}(X) = \sum_{A \cap B = X} m_1(A) m_2(B) + \sum_{\substack{A \cup B = X \\ A \cap B = \emptyset}} m_1(A) m_2(B).$$

- Precise transfer of the global conflict
- Algorithm complexity higher

Reliability assumption

Disjunctive rule

- If no knowledge about reliability: at least one source is reliable

$$m_{\text{Dis}}(X) = \sum_{Y_1 \cup \ldots \cup Y_s = X} \prod_{j=1}^{S} m_j(Y_j). \qquad (12)$$

- Main problem: lost of specificity after combination

Reliability assumption

Florea (2006) rule

- Stay in closed world
- Propose a global conflict transfer in a such way more the global conflict is high more the rule has a disjunctive comportment.
- The rule is given $\forall X \in 2^\Omega,\ X \neq \emptyset$ by:

$$m_{\text{Flo}}(X) = \beta_1(\kappa) m_{\text{Dis}}(X) + \beta_2(\kappa) m_{\text{Conj}}(X),$$

where β_1 and β_2 have $\kappa = \frac{1}{2}$ like a symmetric weight:

$$\beta_1(\kappa) = \frac{\kappa}{1 - \kappa + \kappa^2},$$
$$\beta_2(\kappa) = \frac{1 - \kappa}{1 - \kappa + \kappa^2}.$$

- We have seen that $1/2$ cannot be the symmetric value of the global conflict
- Other weights are proposed

Reliability assumption

(Martin et Osswald, 2007): **Mixed rule**

- General distribution of partial conflict

$$\begin{aligned} m_{\text{Mix}}(X) &= \sum_{Y_1 \cup Y_2 = X} \delta_1 m_1(Y_1) m_2(Y_2) \\ &+ \sum_{Y_1 \cap Y_2 = X} \delta_2 m_1(Y_1) m_2(Y_2) \end{aligned} \tag{13}$$

- Dubois and Prade's rule
  $\delta_1(Y_1, Y_2) = 1 - \delta_2(Y_1, Y_2) = \mathbb{1}_{Y_1 \cap Y_2 = \emptyset}(Y_1, Y_2)$
  and Florea's rule can be seen such as a particular case

Reliability assumption

Mixed rule: taking into account the specificity

The choice of $\delta_1 = 1 - \delta_2$ can be given from a dissimilarity measure such as:

$$\delta_1^1(Y_1, Y_2) = 1 - \frac{|Y_1 \cap Y_2|}{\min(|Y_1|, |Y_2|)} \tag{14}$$

or from the Jaccard's dissimilarity:

$$\delta_1^2(Y_1, Y_2) = 1 - \frac{|Y_1 \cap Y_2|}{|Y_1 \cup Y_2|} \tag{15}$$

- If $Y_1 \cap Y_2 = \emptyset$: partial conflicts can be interpreted such as partial ignorances
- If $Y_1 \cap Y_2 \notin \{Y_1, Y_2, \emptyset\}$: transfer on $Y_1 \cap Y_2$ and $Y_1 \cup Y_2$ according to δ_1^1 and δ_1^2


Number of sources

LNS rule: (Zhou *et al.* 2017)

- Problems:
  - Many sources: assumption of the reliability of all the sources difficult to consider
  - Disjunctive rule: at least one source reliable but lost of specificity
- Assumptions of LNS rule
  - Majority of sources are reliable
  - The larger extent one source is consistent with others, the more reliable the source is
  - Sources are cognitively independent

Number of sources

LNS rule: (Zhou *et al.* 2017)

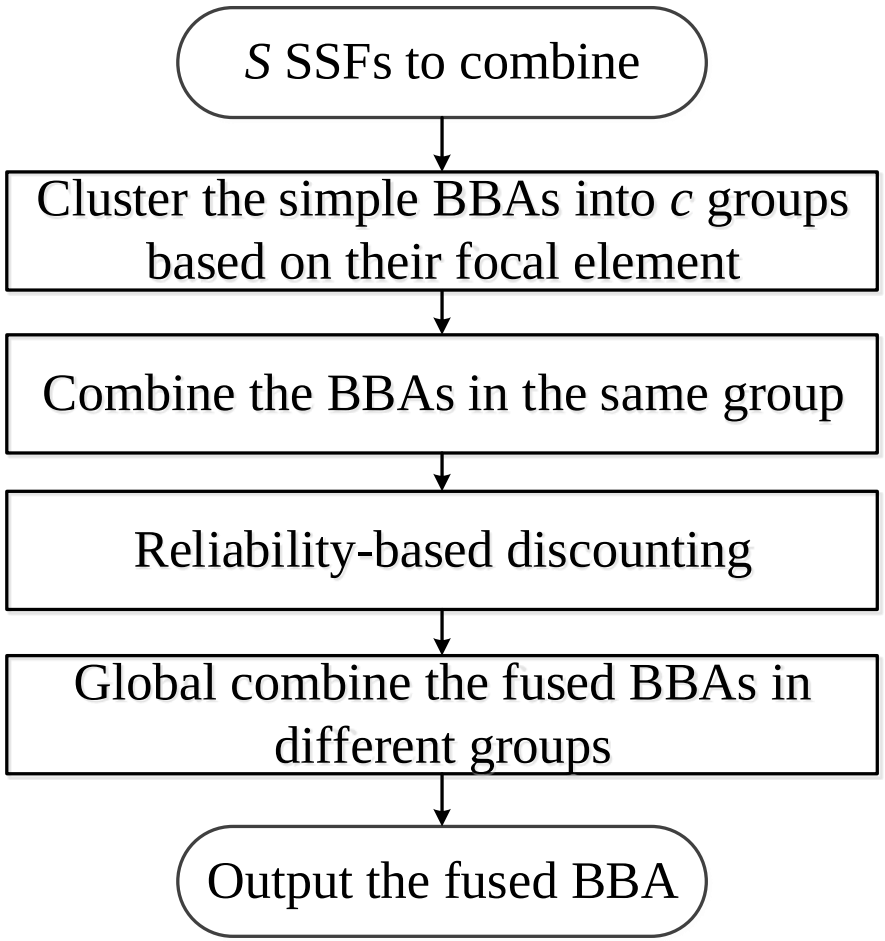

Number of sources

LNS rule: (Zhou *et al.* 2017)

For each mass function m_j we consider the set of mass functions $\{A_k^{w_j}, A_k \subset \Omega\}$ coming from the canonical decomposition. If group the simple mass functions $A_k^{w_j}$ in c clusters (the number of distinct A_k) and denote by s_k the number of simple mass functions in the cluster k, the proposed rule is given by:

$$m_{\text{LNS}} = \textcircled{\cap}_{k=1,\cdots,c}(A_k) \qquad 1-\alpha_k+\alpha_k \prod_{j=1}^{s_k} w_j \tag{16}$$

where

$$\alpha_k = \frac{s_k}{\frac{c}{\sum_{i=1} s_i}}. \tag{17}$$

What to do to manage the conflict?


- First, if you have any reliable information on the reliability of the sources: discount the mass functions.
- If there is still global conflict: choose an appropriate rule to manage this conflict.
- There is no an optimal rule for any application.
  1. Choose the rule according to the needed properties (reliability, idempotence, independence, complexity, etc.)
  2. Try some rules and choose the best for your application

Outline

1. Introduction to information fusion
2. Theory of belief functions for information fusion
3. Managing conflict
4. Decisions with conflicting bbas

Decisions with conflicting bbas

- Another point of view: do not manage the conflict and keep it until the decision
- That is the point of view of Smets with the use of the conjunctive rule and the pignistic probability for the decision.
- Other idea: keep all the partial conflicts during the combination rule:
  - Hyper power set $D^\Omega = \{\omega_1 \cap \omega_2, \omega_1, \omega_2, \omega_1 \cup \omega_2\}$, if $\Omega = \{\omega_1, \omega_2\}$
  - D_r^Ω: reduced set with constraints $(\omega_2 \cap \omega_3 \equiv \emptyset)$

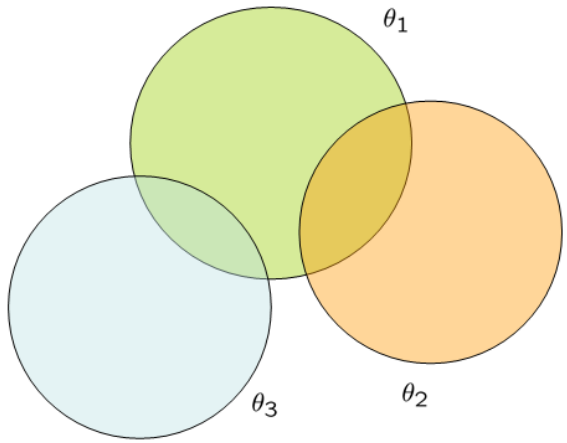

Decision

- In D^Ω classic decision can be made on Ω without partial conflict
  - Pessimist: $\max_{\omega \in \Omega} bel(\omega)$
  - Optimist: $\max_{\omega \in \Omega} pl(\omega)$
  - Compromise: $\max_{\omega \in \Omega} betP(\omega)$

Pignistic probability:

$$\mathrm{GPT}(X) = \sum_{Y \in D_r^\Omega, Y \not\equiv \emptyset} \frac{\mathcal{C}_\mathcal{M}(X \cap Y)}{\mathcal{C}_\mathcal{M}(Y)} m(Y) \tag{18}$$

where $\mathcal{C}_\mathcal{M}(X)$ is the cardinality X of D_r^Ω

Decision process

(Martin et Quidu, 2008) decision process:

1. Reject the elements not in the learned classes

   (Le Hégarat-Mascle *et al.* 1997)

$$\begin{cases} \text{bel}(\omega_d) = \max\limits_{1 \leq i \leq n} \text{bel}(\omega_i) \\ \text{bel}(\omega_d) \geq \text{bel}(\overline{\omega_d}) \end{cases} \tag{19}$$

2. Decision on 2^Ω on the non-rejected elements

   The decision functions f_d (belief, plausibility, pignistic probability, etc.) increase by inclusion (Appriou, 2014)

$$A = \underset{X \in 2^\Omega}{\text{argmax}} \left(m_d(X) f_d(X) \right), \quad m_d(X) = \left(\frac{K_d \lambda_X}{|X|^r} \right) \tag{20}$$

$r \in [0, 1]$, $r = 1$: singleton, $r = 0$: ignorance

Decision in presence of conflict

Example




Data GESMA




Sand



Rock



Rock OR Sand



Rock AND Sand

Wreck or object

Decision on conflicting bbas

(Martin, 2008): decision on D^Ω

- on D_r^Ω

$$A = \underset{X \in D_r^\Omega}{\operatorname{argmax}} \left(m_d(X) f_d(X) \right)$$


$$m_d(X) = \left(\frac{K_d \lambda_X}{\mathcal{C}_\mathcal{M}(X)^r} \right)$$


- on $\mathcal{D}$ a subset of D^Ω

$$A = \underset{X \in \mathcal{D}}{\operatorname{argmax}} \left(m_d(X) f_d(X) \right)$$

such as the cardinality

$$\mathcal{D} = \left\{ X \in D_r^\Omega ; \min_C \leq \mathcal{C}_\mathcal{M}(X) \leq \max_C \right\}$$

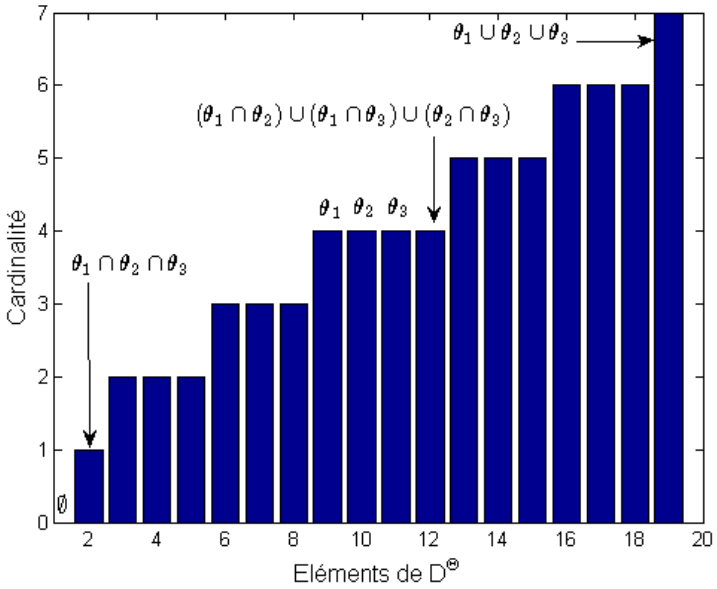

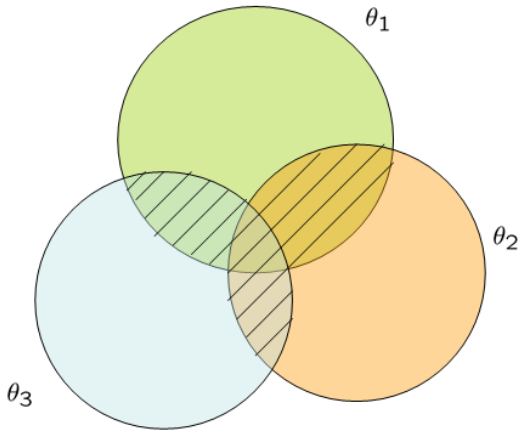

Decision on conflicting bbas

Decision on 2^Ω (Essaid, *et al.* 2014)

$$A = \underset{X \in \mathcal{D}}{\operatorname{argmin}}\, d(m, m_X),$$

where

- $\mathcal{D}$ is the set of elements of 2^Ω on which we want to decide,
- m_X is a categorical mass function,
- d is a distance on mass functions (such as Jousselme distance)
- m is the mass function coming from the function

No threshold r to fit to decide on imprecise element of 2^Ω

To end

The theory of belief functions provides an appropriate framework for information fusion.
Take care of conflict

- Model the conflict correctly
- Suppress the conflict
- Manage the conflict in the combination rule
- Keep the conflict until the decision step

References

- A. Appriou, Uncertainty Theories and Multisensor Data Fusion John Wiley & Sons, Inc., 2014
- Destercke, S. and Burger, T. Revisiting the notion of conflicting belief functions, International conference on belief functions, Compiègne, France (2012)
- Dubois, D. and Prade, H. A note on measures of specificity for fuzzy sets, International Journal of General Systems, vol. 10, no. 4, pp. 279–283, (1985)
- Dubois, D. and Prade, H. Representation and Combination of uncertainty with belief functions and possibility measures, Computational Intelligence, vol. 4, pp. 244-264, (1988)
- A. Essaid, A. Martin, G. Smits, and B. Ben Yaghlane, A distance-based decision in the credal level. International Conference on Artificial Intelligence and Symbolic Computation AISC 2014, Sevilla, Spain, December 2014.

References

- Florea, M.C., Dezert, J., Valin, P., Smarandache, F. and Jousselme, A.L. Adaptative combination rule and proportional conflict redistribution rule for information fusion, COGnitive systems with Interactive Sensors, Paris, France, (2006)
- Jousselme, A.-L., Grenier D. and Bossé, E. A new distance between two bodies of evidence, Information Fusion, vol. 2, pp. 91-101, (2001)
- Jousselme, A.-L. and Maupin, P. Distances in evidence theory: Comprehensive survey and generalizations, International Journal of Approximate Reasoning, (2011)
- Klir, G.J. Measures of uncertainty in the Dempster-Shafer theory of evidence, Advances in the Dempster-Shafer Theory of Evidence, John Wiley and Sons, New York, R.R. Yager and M. Fedrizzi and J. Kacprzyk edition, pp. 35-49, (1994)

References

- S. Le Hégarat-Mascle and I. Bloch and D. Vidal-Madjar, Application of Dempster-Shafer Evidence Theory to Unsupervised Classification in Multisource Remote Sensing, in IEEE Transactions on Geoscience and Remote Sensing, vol. 35, no. 4, pp. 1018–1031, (1997)
- Liu, W. Analyzing the degree of conflict among belief functions, Artificial Intelligence, vol. 170, pp. 909-924, (2006)
- Martin, A., Jousselme, A.-L. and Osswald, C. Conflict measure for the discounting operation on belief functions, International Conference on Information Fusion, Cologne, Germany, (2008)
- Martin, A., Quidu, I. Decision Support with Belief Functions Theory for Seabed Characterization, International Conference on Information Fusion, Cologne, Germany, (2008)

References

- Martin, A. About conflict in the theory of belief functions, International Conference on Belief Functions, Compiègne, France, 8-10 May 2012.
- Martin, Conflict management in information fusion with belief functions in Information quality in Information Fusion and decision making, Springer, E. Bossé and G. Rogova (eds.) (2018)
- Martin, A. and Osswald, C. Toward a combination rule to deal with partial conflict and specificity in belief functions theory, International Conference on Information Fusion, Québec, Canada, (2007)
- Martin, A. About conflict in the theory of belief functions, International conference on belief functions, Compiègne, France (2012)

References

- Osswald, C. and Martin, A. Understanding the large family of Dempster-Shafer theory's fusion operators - a decision-based measure, International Conference on Information Fusion, Florence, Italy, (2006)
- Shafer, G. A mathematical theory of evidence. Princeton University Press, (1976)
- Shubert, J. The internal conflict of a belief function, International conference on belief functions, Compiègne, France (2012)
- Smarandache, F., Martin, A. and Osswald, C. Contradiction measures and specificity degrees of basic belief assignments, Proc. of 14th International Conference on Information Fusion, Chicago, USA, pp. 475-482 (2011)

References

- Smets, Ph. Analyzing the combination of conflicting belief functions, Information Fusion, vol. 8, no. 4, pp. 387-412, (2007)
- Yager, R.R. Entropy and Specificity in a Mathematical Theory of Evidence, International Journal of General Systems, vol. 9, pp. 249-260, (1983)
- Yager, R.R. On the Dempster-Shafer Framework and New Combination Rules, Informations Sciences, vol. 41, pp. 93-137, (1987)
- Zhou, K, Martin, A. and Pan, G, Evidence combination for a large number of sources, International Conference on Information Fusion, Xi'an, China, (2017)